


NON-METALLIC


3" NON-METALLIC AODD PUMP

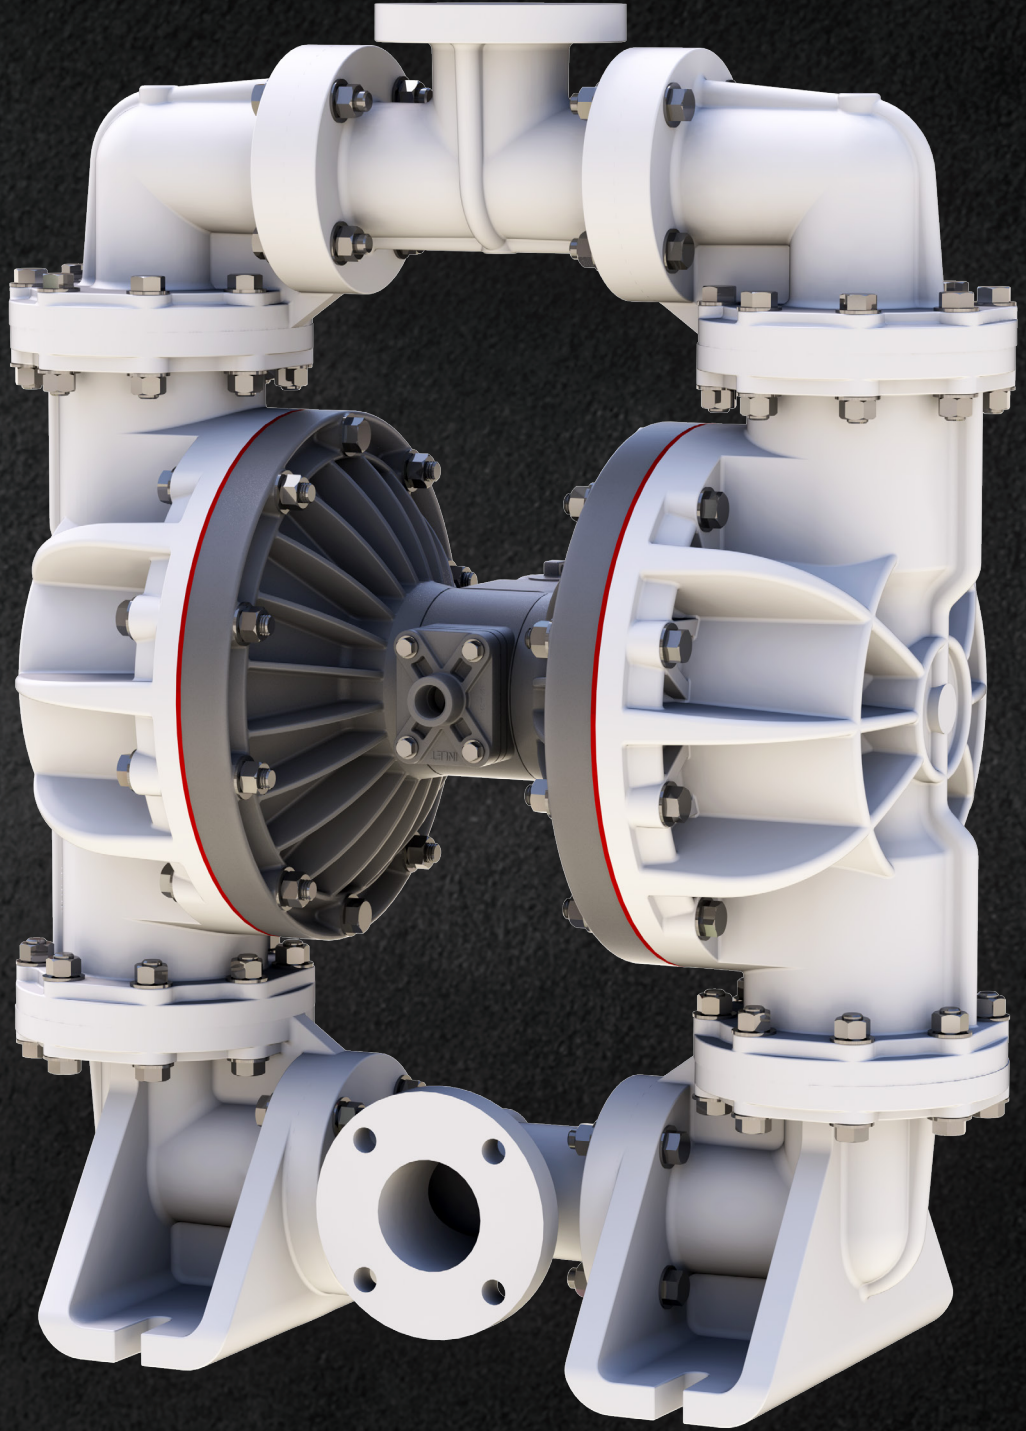


VERSA-MATIC®
VERSAMATIC.COM

OVERVIEW

- Class Leading Flow Rates - 280 GPM (1,060 lpm)
- Non-metallic corrosion resistant Wet Side and Air Side
- Low weight for ease of mobility (24% lighter than previous model)
- Safe leak-free bolted construction

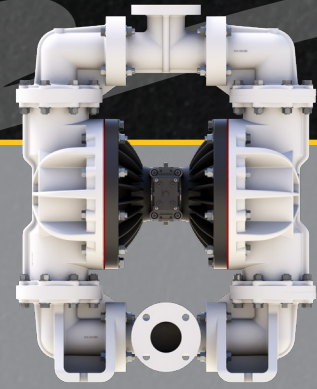

PERFORMANCE:

Suction / Discharge Port Size.....3" ANSI Flange or 80mm DIN Flange
 Capacity..... 0 to 280 gpm (0 to 1,060 lpm)
 Air Distribution ValveNo lube, no-stall design
 Solids HandlingUp to .75 in. (19mm)
 Heads Up To.....100 psi or 231 ft. of water
(7 bar or 70 meters)
 Maximum Operating Pressure. 100 psi (7 bar)
 Displacement / Stroke 1 Gallon / 8 liter
Weights
 Polypropylene.....208 lbs (94 kg)
 PVDF.....271 lbs (123 kg)

KEY APPLICATIONS:

- Bulk chemical transfer
- Waste treatment (filter press feed)



FEATURES:

- Heavy duty construction
- Proven Elima-Matic air valve system
- On / Off reliability
- Wetted Materials
 - Polypropylene
 - PVDF

ADVANTAGES:

- High chemical resistance
- Diverse material offering
- Class leading air efficiency
- Robust, lightweight construction
- Non-freezing, Non-stalling, On / Off reliability

3" (80MM) CURVES

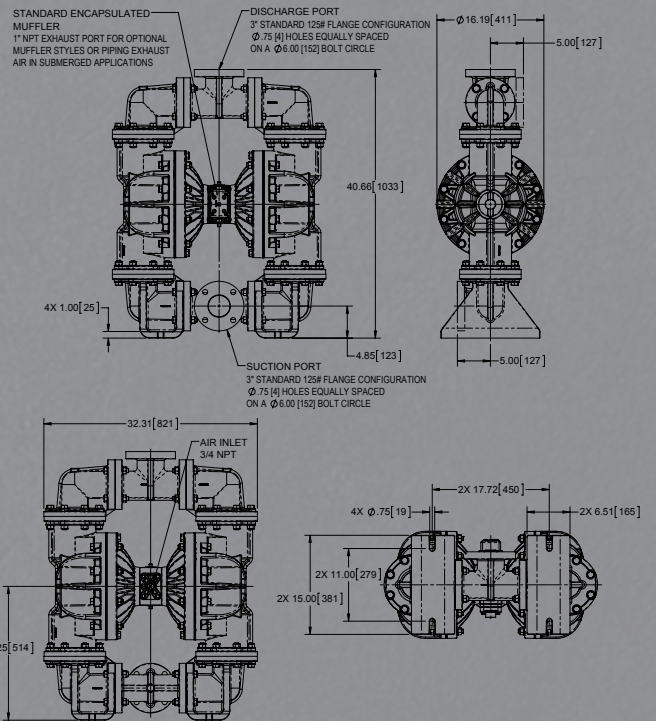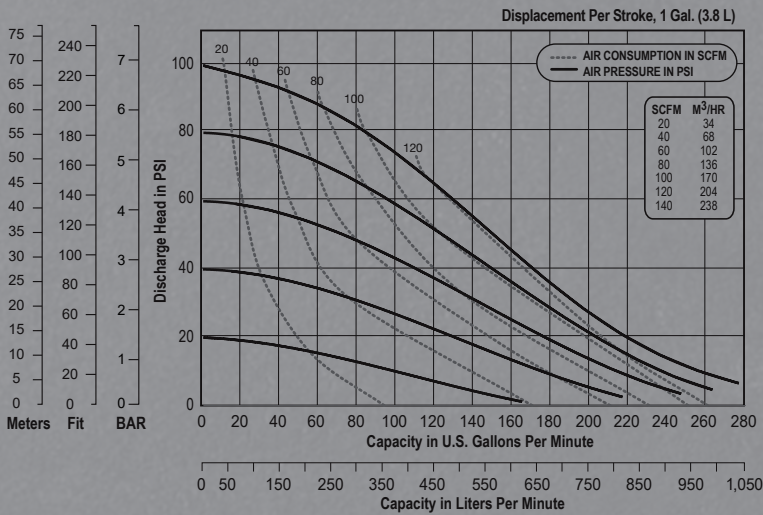

Distributed By:

VERSA-MATIC®
 Warren Rupp, Inc.
 A Unit of IDEX Corporation
 800 North Main Street
 Mansfield, OH 44902 USA
 Phone: 419.526.7296
 Fax: 419.526.7289
versamatic.com

